

Continental 
The Future in Motion



Racing Tires 2024

For ultimate performance
in racing applications.

continental-tires.com/motorcycle

ContiTrack

Slick tire for track days and hobby racers (NHS).

- › Sustainable performance together with higher durability.
- › New carcass construction for significantly greater braking stability, precise turn-in and noticeably better corner exit traction.
- › Compound variations, adapted to supersport bikes and superbikes.



ZeroDegree



Handmade
in Germany

Rim Ø	Size	TL/TT	Compound	Article No.	Remarks
Front wheel					
17"	120/70 R 17 NHS	TL	Soft	02 44 403	
	120/70 R 17 NHS	TL	Medium	02 44 404	
Rear wheel					
17"	180/60 R 17 NHS	TL	Medium	02 44 411	
	200/55 R 17 NHS	TL	Medium	02 44 629	

Applications

180/60 R 17	5 ½" Rims	for supersport bikes
200/55 R 17	6" Rims	for supersport bikes and superbikes

Compound variations

Soft	Sprint racing, one-day training; good for high outdoor temperatures
Medium	Sprint racing, long-distance racing, 1-2 day training; for a wide range of outdoor temperatures

Recommendation

Front wheel	Soft
Rear wheel	Medium



Recommended tire pressure


For racing use:

After at least an hour with the tire warmers at 176 °F / 80 °C, the tire pressure should be measured and adjusted immediately after the first short session.

ContiTrack	Front	Rear
Hot (80 °C / 176 °F)	2.25 bar / 32.5 psi	1.55 bar - 1.7 bar 22.5 psi - 24.6 psi

Rear wheel dimensions

Size	Diameter	Circumference	Width
180/60 R 17	649 mm	2039 mm	184 mm
200/55 R 17	655 mm	2058 mm	192 mm

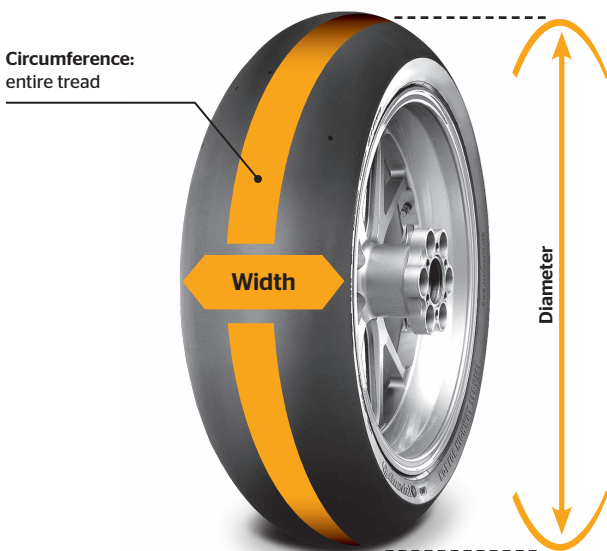

ContiRace *ATTACK* Rain

Competition rain tire (NHS).

- › Innovative pattern design to ensure optimal water clearance and high grip in extreme wet track conditions.
- › Controllable ride with high feedback characteristics providing excellent traction even under adverse riding conditions due to a state-of-the-art racing rain compound.



ZeroDegree



Handmade
in Germany

Rim Ø	Size	TL/TT	Article No.	Remarks
Front wheel				
17"	120/70 R 17 NHS	TL	02 44 263	
Rear wheel				
17"	180/55 R 17 NHS	TL	02 44 264	
	190/55 R 17 NHS	TL	02 44 107	

Recommended tire pressure

Tip: Use the tire without the tire warmer so that the rider can get used to the increasing grip. However, it is also possible to pre-heat the tire.

WARNING! Tire pressure depends on the outdoor temperature.

Use without tire warmers:

ContiRaceAttack Rain	Front	Rear
Cold	2.1 - 2.3 bar / 30.45 - 33.35 psi	2.1 - 2.3 bar

Use with tire warmers:

ContiRaceAttack Rain	Front	Rear
Hot (40 °C / 104 °F)	max. 2.4 bar / 34.80 psi	max. 2.4 bar / 34.80 psi

ContiRace *ATTACK 2* soft / medium

Street legal race tire
for maximum performance.

- › Treaded racetrack tire for amateur racers.
- › With BlackChili Compound fast warm-up and consistently high grip - available in both soft and medium compound.
- › Higher stability when braking into and accelerating out of corners, together with constantly good feedback (GripLimitFeedback Technology).
- › Uncomplicated application: in various conditions, these race tires maintain temperature more consistently.
- › Tested with low air pressure for racetrack use; tire warmers recommended for track use.
- › Street legal up to 270 km/h (169 mph).
- › Depending on the application, this tire can be combined with the ContiRaceAttack 2 Street for more durability during Endurance racing.



MultiGrip



ZeroDegree

GripLimit
FeedbackHandmade
in Germany

Rim Ø	Size	LI/SI	TL/TT	Compound	Article No.	Remarks
Front wheel						
17"	120/70 ZR 17 M/C	58 W	TL	Soft	02 44 650	
	120/70 ZR 17 M/C	58 W	TL	Medium	02 44 654	
Rear wheel						
17"	160/60 ZR 17 M/C	69 W	TL	Medium	02 44 655	
	180/60 ZR 17 M/C	75 W	TL	Medium	02 44 656	
	190/55 ZR 17 M/C	75 W	TL	Medium	02 44 657	

Recommended tire pressure

For racing use:

After at least an hour with the tire warmers at 176 °F / 80 °C, the tire pressure should be measured and adjusted immediately after the first short session.

ContiRaceAttack 2 soft / medium	Front	Rear
Cold	2.2 - 2.3 bar / 31.90 - 33.35 psi	2.0 bar / 29.00 psi
Hot (80 °C / 176 °F)	2.4 - 2.5 bar / 34.80 - 36.25 psi	up to 2.4 bar / 34.80 psi

ContiRace *ATTACK* 2 Street

Our fastest racing street tire for road and track day riding.

- › Our race track tire - also for your favourite road rides.
- › For maximum grip on road and race track surfaces.
- › Minimal negative tread, no grooves on shoulder to allow maximum grip at lean angles.
- › Maximum predictability at the limit due to special carcass construction and tread compound (GripLimitFeedback technology).
- › Tested with low air pressure for race track use; also suitable with tire warmers.
- › For even greater performance on the race track, the ContiRaceAttack 2 Street may be combined with the ContiRaceAttack 2 soft / medium.
- › Original equipment on BMW M 1000 XR.



MultiGrip



ZeroDegree



GripLimit
Feedback



Handmade
in Germany

Rim Ø	Size	LI/SI	TL/TT	Article No.	Remarks
Front wheel					
17"	120/70 ZR 17 M/C	(58 W)	TL	02 44 658	
Rear wheel					
17"	180/55 ZR 17 M/C	(73 W)	TL	02 44 659	
	190/55 ZR 17 M/C	(75 W)	TL	02 44 661	
	200/55 ZR 17 M/C	(78 W)	TL	02 44 662	

Recommended tire pressure

For racing use:

After at least an hour with the tire warmers at 176 °F / 80 °C, the tire pressure should be measured and adjusted immediately after the first short session.

ContiRaceAttack 2 Street	Front	Rear
Cold	2.2 - 2.3 bar / 31.90 - 33.35 psi	2.0 bar / 29.00 psi
Hot (80 °C / 176 °F)	2.4 - 2.5 bar / 34.80 - 36.25 psi	up to 2.4 bar / 34.80 psi

ContiSport **ATTACK 4**

Maximum grip, light handling and superb steering accuracy.

- › More grip and improved traction thanks to the latest compound technology.
- › Larger footprint at extreme lean angles due to the new tread design.
- › Agility and precision when turning.
- › Providing dependable riding characteristics from the very first kilometres.
- › Enhanced wet traction through RainGrip technology.
- › Also suitable for amateur racing (without tire warmers).
- › Original equipment on KTM 1290 Super Duke GT.



TractionSkin



MultiGrip



ZeroDegree



RainGrip



GripLimit Feedback



Handmade in Germany

Rim Ø	Size	LI/SI	TL/TT	Article No.	Remarks
Front wheel					
17"	120/70 ZR 17 M/C	(58 W)	TL	02 44 598	
Rear wheel					
17"	160/60 ZR 17 M/C	(69 W)	TL	02 44 604	
	180/55 ZR 17 M/C	(73 W)	TL	02 44 603	
	190/50 ZR 17 M/C	(73 W)	TL	02 44 602	
	190/55 ZR 17 M/C	(75 W)	TL	02 44 600	
	200/55 ZR 17 M/C	(78 W)	TL	02 44 599	

ContiRoad **ATTACK 3 CR**

The choice for classic short circuit racers and classic endurance bikes.

- › Successor of the legendary and well-known test winner, ContiRoadAttack 2 CR.
- › Optimized racing compound for maximum grip.
- › Special radial classic bike carcass for narrow rims providing extraordinary handling and stability; the benchmark in the classic racing Segment.
- › Improved wet performance due to a new tread pattern design and compound, developed for Classic and Vintage racing.
- › Customized pattern design for the 150/65 R 18 size for maximum performance during acceleration at corner exit.
- › GripLimitFeedback technology for predictable handling at the limit.



110/80 R 18 58 V
150/65 R 18 69 H



TractionSkin



MultiGrip



ZeroDegree



RainGrip



GripLimit
Feedback



Handmade
in Germany

Rim Ø	Size	LI/SI	TL/TT	Standard rims (ETRTO)	Article No.	Remarks
Front wheel						
18"	100/90 R 18 M/C	56 V	TL	1.60 x 18 1.85 x 18 2.15 x 18 2.50 x 18 2.75 x 18	02 44 564	Compound Update from DOT 2821
	110/80 ZR 18 M/C	(58 W)	TL	2.15 x 18 2.50 x 18 2.75 x 18 3.00 x 18	02 44 565	Compound Update from DOT 3121
Rear wheel						
18"	110/80 R 18 M/C	58 V	TL	2.15 x 18 2.50 x 18 2.75 x 18 3.00 x 18	02 44 583	
	130/80 R 18 M/C	66 V	TL	2.75 x 18 3.00 x 18 3.50 x 18	02 44 566	Compound Update from DOT 0523
	150/65 R 18 M/C	69 H	TL	4.00 x 18 4.25 x 18 4.50 x 18	02 44 558	

Rim classifications

Front wheel

Size	Standard rim (ETRTO)
100/90 R 18 M/C 56V TL	1.85 x 18; 2.50 x 18; 2.75 x 18
110/80 ZR 18 M/C (58W) TL	2.50 x 18; 2.75 x 18; 3.00 x 18

Rear wheel


Size	Standard rim (ETRTO)
110/80 R 18 M/C 58 V TL	2.15 x 18; 2.50 x 18; 2.75 x 18; 3.00 x 18
130/80 R 18 M/C 66V TL	3.00 x 18; 3.50 x 18
150/65 R 18 M/C 69H TL	4.00 x 18; 4.25 x 18; 4.50 x 18

Recommended tire pressure

ContiRoadAttack 3 CR	Front	Rear
Cold	100er - 2.1 - 2.2 bar / 30.45 - 31.9 psi 110er - 2.2 - 2.3 bar / 31.9 - 33.35 psi	130er - 2.0 - 2.2 bar / 29 - 31.9 psi 150er - 1.8 - 2.0 bar / 26.1 - 29 psi

When should I use each tire?

The tire temperature should be measured immediately after the first lap and tire pressure should be adjusted.

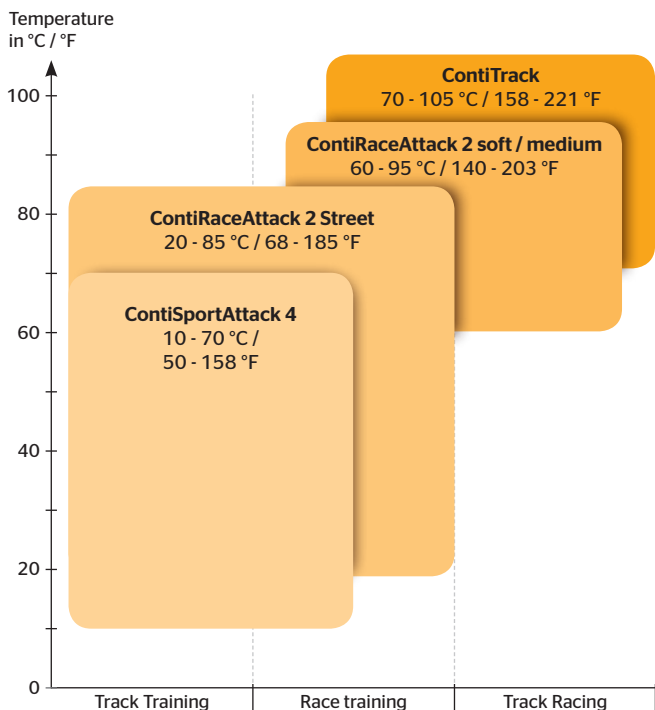

- ContiTrack:**
For track racing and race training. Use of tire warmers recommended.
NHS - Not street legal.
- ContiRaceAttack 2 soft / medium:**
For track racing and race training. Use of tire warmers recommended.
Street legal up to 270 km/h / 169 mph.
- ContiRaceAttack 2 Street:**
For riding and race training in dry conditions.
Use without tire warmers possible. Street legal.
- ContiSportAttack 4:**
Also suitable for hobby race track use (without tire warmers).
- ContiRaceAttack Rain:**
For use on completely wet race tracks.
NHS - Not street legal.
- ContiRoadAttack 3 CR:**
18" racing tire for use on classic motorcycles.
Street legal.



ContiRaceAttack 2
soft / medium

Racing



90 %



10 %
(≤ 270 km/h)

Reduced tire pressure
for the race track



Can be combined with
ContiRaceAttack 2
Street

Tire warmer
(recommended)



ContiRaceAttack 2
Street

Hypersport



50 %



50 %

Reduced tire pressure
for the race track



Can be combined with
ContiRaceAttack 2
soft / medium

Tire warmer
(possible)



ContiSportAttack 4

Supersport



10 %



90 %

Reduced tire pressure
for the race track



Tire warmer
(no)



Continental Reifen Deutschland GmbH


Business Area Specialty Tires Motorcycle

Continental-Plaza 1
30175 Hannover
Germany

Legal Notice:

Continental Reifen Deutschland GmbH accepts no liability in conjunction with this publication. To the extent permitted by law, any liability for any direct, indirect, incidental, consequential or punitive damages of any kind arising out of the use of the information included in this publication is hereby excluded.

Your local dealer



Further information can be obtained from www.continental-tires.com/motorcycle